



Richelieu's 3 W LED Series

Product # 155121170

Finish Stainless Steel

Light Color Cool White

Kelvin Color Temperature (K) 6000 K - 6500 K

Luminous Flux 170 Lumen

DESCRIPTION

Surface or recessed installation

New high-powered 3 W round LED light with a solid aluminum housing. Frosted glass cover with glossy aluminum reflector inside.

Bore hole: 2-1/8" (55mm) Recess depth: 5/8" (15mm)


ADVANTAGES AND BENEFITS

- High-quality Cree LED - Friction-fit installation - Average rated life of 50,000 hours



REQUIRED PRODUCTS

Requires ONE of the following products

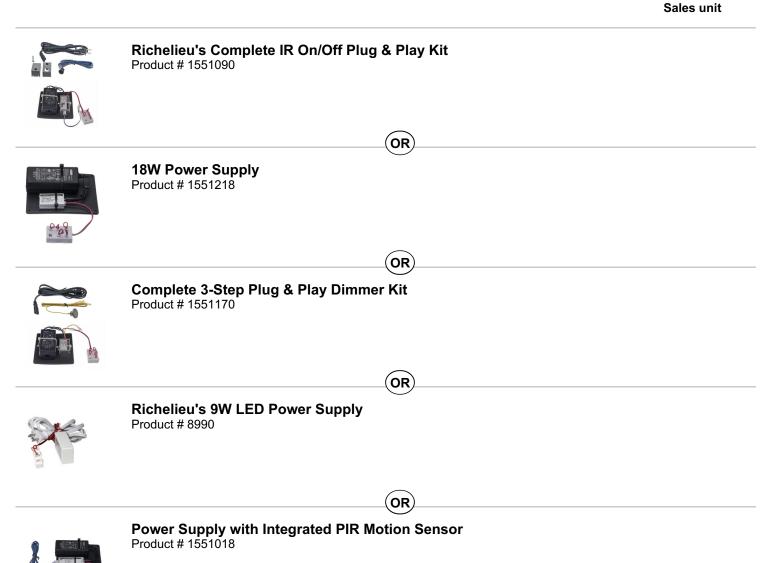



TECHNICAL SPECIFICATIONS

| Product # | 155121170 |
|------------------------------|---|
| Location | Inside Cabinet, Furniture, Countertop |
| Application | Kitchen, Living Room, Furniture, Closet |
| Mounting | Recessed, Surface |
| Luminaire | Fixed Spots |
| Lighting | Accent, Task |
| Standards and Certifications | ETL |
| Style | Contemporary |
| Height | 5/8 in |
| Diameter | 2 51/64 in |
| Recessed Depth | 5/8 in |
| Bore Hole | 2 1/8 in |
| Lighting Type | LED |
| Tension (V) | 12 V |
| Watts | 3 W |
| Price Point | Optimum |
| Features | Dimmable, Touch Function |

APPLICATION

- Accents and perimeters - Closets - Furniture - Bookcases, kitchen cabinets, and kitchen countertops

INCLUDED PRODUCT(S)

Includes a 59" quick-connect cable with a plug for connections between LED lights and power supply (power supply sold separately; see Required Products section).

IMPORTANT INFORMATION

Requires a power supply. Please see required products for options.

DISCLAIMER

Always connect the LED light to the power supply first and then connect the power supply to the mains, failure to do so may cause damage to the existing diode. There is no replacement bulb available for this light due to its life span average of 50, 000 hours Richelieu grants no warranty on LED lights if another power supply other than the one specifically prescribed for this product is used. Do not exceed the maximum wattage by connecting more lights than prescribe damage to the power supply may result. All unused power supply output plugs must have jumper installed. Do not cut or splice wiring or the lighting system may be damaged and manufacturer's warranty is voided.

PRODUCT PHOTOS















