




Brand	Root
RTR	DS...

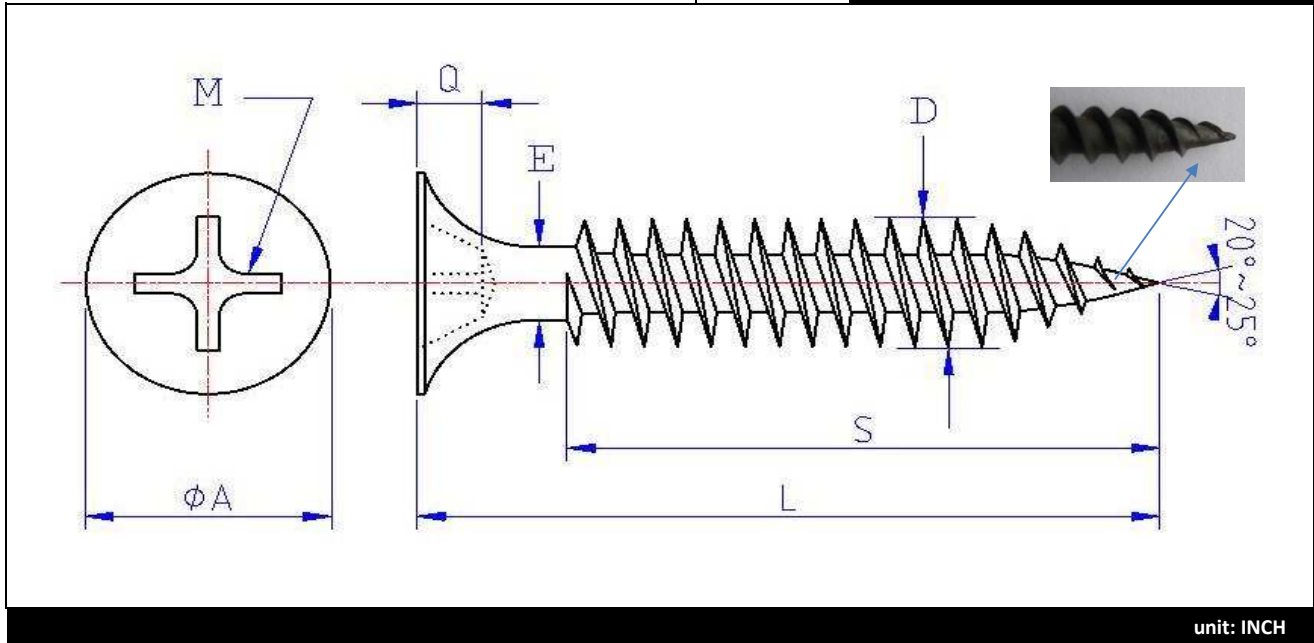

L LENGTH TOLERANCE	> 5/8" to ≤ 1-1/2"	- 0.05	+ 0
	> 1-1/2" to ≤ 2-3/4"	- 0.06	+ 0
	> 2-3/4"	- 0.09	+ 0

S THREAD LENGTH	< 2-1/2"	Full Thread
	≥ 2-1/2"	2" ± 0.1

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	E BODY DIAM.	D THREAD DIAM.	THREAD PER INCH	TORQUE INCH/ POUND
# 6	# 2	Min	0.104	0.315	0.104	0.136	15	24
		Max	0.125	0.335	0.111	0.147		
# 7	# 2	Min	0.104	0.315	0.113	0.147	15	30
		Max	0.125	0.335	0.119	0.155		
# 8	# 2	Min	0.104	0.315	0.122	0.160	15	39
		Max	0.125	0.335	0.129	0.168		

**Flat Bugle Head Drywall screw, Phillips drive, Type-S (Sharp Point),
Twinfast Single lead, Black Phosphate (Dry to Touch)**

The first thread must start near of the point & the second thread must start after a completed turn of the first one

Screw must be made using steel 1018 ~ 1022 case hardened

Root = Dry-wall Screw

Bulk Label Description:

- English : BUGLE HEAD, PHILLIPS, DRYWALL SCREW, FINE THREAD, BLACK PHOSPHATE
- French : VIS À MUR SEC, TÊTE TROMPETTE, CRUCIFORME, FILET FIN, NOIR PHOSPHATE
- Spanish : CABEZA TROMPETA PHILLIPS, ROSCA FINA, FOSFATO NEGRO

Date: 21 janvier 2019

Done by: P.B.