

Technical Data Sheet



Eclectic Products, Inc.
Manufacturing Facility
101 Dixie Mae Drive
Pineville, Louisiana
eclecticproducts.com
800.349.4667

ISO 9001:2008
Compliant
Quality Management
Systems

Administration Office
Eugene, Oregon
eclecticproducts.com
800.693.4667

UNITED STATES



3.25 fl oz / 92.14 g
Net Wt 6 oz / 144 g
Net Wt 24 oz / 576 g
Gallon / 5000 g

Not all styles/sizes/colors available in all areas.



FAMOWOOD

LATEX WOOD FILLER

PRODUCT DESCRIPTION

First choice of woodworking professionals for more than 70 years! Whether you are masking small or large defects, FAMOWOOD can be used inside or outside and takes stains and paints evenly, making it ideal for any custom project. FAMOWOOD spreads evenly into crack and holes without shrinking, crumbling or cracking. In addition, FAMOWOOD requires very little sanding to achieve a desired finished look.

WHERE TO USE / APPLICATIONS

Use to fill cracks or holes in wood. Spread evenly into cracks or hole, let dry and sand smooth to surface repaired. Paint or stain to match wood surface.

FEATURES AND BENEFITS

LOW ODOR/EASY CLEAN-UP – latex formula

ACTS LIKE REAL WOOD – saw, drill, sand, plane and nail

INTERIOR/EXTERIOR – use indoors or outdoors

WON'T CRACK OR SHRINK – spread evenly into cracks and holes without crumbling or cracking

SUPERIOR STRENGTH – hard finish with little or no shrinkage

QUALITY FINISH – takes stains and paints evenly with minimal sanding




TECHNICAL INFORMATION

PHYSICAL PROPERTIES

Colors (10):	Birch, Cherry/Dark Mahogany, Fir/Maple, Golden Oak, Natural, Oak, Red Oak, Walnut, White, White Pine
Density:	15.0 – 16.0 lbs/gal
Solids:	82% +/- 2.0% (by weight)
Application Temperature:	40 to 90 °F (4 to 32 °C)
Service Temperature:	10 to 150 °F (-12 to 66 °C)
Storage Temperature:	Store between 45 and 85 °F (7 and 29 °C)
Freeze/thaw stability:	Freeze/thaw stability: It is recommended to keep the product from freezing whenever possible. If the product should freeze, it is stable and re-workable up to three freeze cycles. Allow product to warm to room temperature and stir or knead completely before using.
Shelf life:	1 year

TEST RESULTS: FAMOWOOD vs. COMPETITION

APPLIED FORCE NEEDED TO CAUSE WOOD FILLER POP OUTS

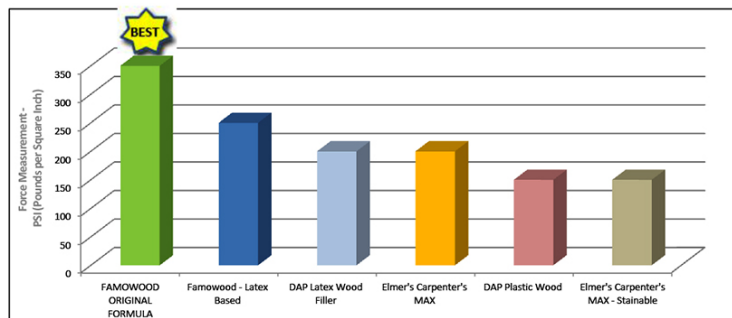

Technical Data Sheet



FAMOWOOD LATEX WOOD FILLER

CANADA



- Net wt. 161 g (3 colors)
- Net wt. 144 g (10 colors)
- Net wt. 576 g (3 colors)
- Net wt. 5000 g (4 colors)

Not all styles/sizes/colors available in all areas.

MIDDLE EAST (ARABIC)



Net wt. 144 g (6 colors)

BETTER ADHESION = NO POP OUTS!

Psi (pounds per square inch). ASTM D 4541-93. Average adhesion strength in a ¼" deep x 2" diameter defect (Average of 5 samples).

STAINABILITY

Wood Filler	Stain Quality
FAMOWOOD ORIGINAL FORMULA	Stains Well
FAMOWOOD LATEX BASED	Stains Well
DAP Plastic Wood	Stains Well
Elmer's Carpenter's MAX – Stainable	Stains Well
DAP Latex Wood Filler	Resists Stains
Elmer's Carpenter's MAX	Resists Stains

DIRECTIONS and APPLICATION NOTES

Always test a small area before full use.

- Step 1 Surface must be clean and dry.
- Step 2 Do not apply below 40 °F / 4 °C.
- Step 3 Allow contents to dry thoroughly before sanding (approx. 30 minutes).
- Step 4 Wear dust mask.
- Step 5 Accepts most water-based and oil-based stains.
- NOTE:** TEST STAIN COMPATABILITY BEFORE USE.
- Step 6 For deep repairs: allow 1st layer to dry before applying subsequent layers.
- Step 7 Replace lid tightly.
- Step 8 KEEP FROM FREEZING.

HEALTH and SAFETY

Before working with this product, read and become familiar with information concerning hazards, proper use and handling. SDS's are available online at the following links:

United States-

English: <http://eclecticproducts.com/downloads/sds-famowood-latex-wood-filler-english.pdf>

Spanish: <http://eclecticproducts.com/downloads/sds-famowood-latex-wood-filler-spanish.pdf>

Canada-

English: <http://eclecticproducts.com/downloads/sds-famowood-latex-wood-filler-english.pdf>

French: <http://eclecticproducts.com/downloads/sds-famowood-latex-wood-filler-french.pdf>

Europe-

English (Request SDS): sds@eclecticproducts.com

French (Request SDS): sds@eclecticproducts.com

German (Request SDS): sds@eclecticproducts.com

Spanish (Request SDS): sds@eclecticproducts.com

Middle East-

Arabic & English (Request SDS): sds@eclecticproducts.com

To request a hard copy of the SDS, please send an e-mail to sds@eclecticproducts.com.

FAMOWOOD

LATEX WOOD FILLER

LIMITED WARRANTY

The product is warranted against any defect in materials or workmanship under normal use for a period of 180 days after the date of purchase. The product is also warranted under any implied warranties provided under applicable state law, including, without limitation, the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, for a period of 180 days after the date of purchase. This warranty covers only the original buyer of the product. For warranty service, the buyer should contact the store where the product was purchased, or write Eclectic Products, Inc., P.O. Box 4450, Pineville LA 71361 or call 800.767.4667. This warranty gives you specific legal rights, and you also have other rights, which vary from state to state.