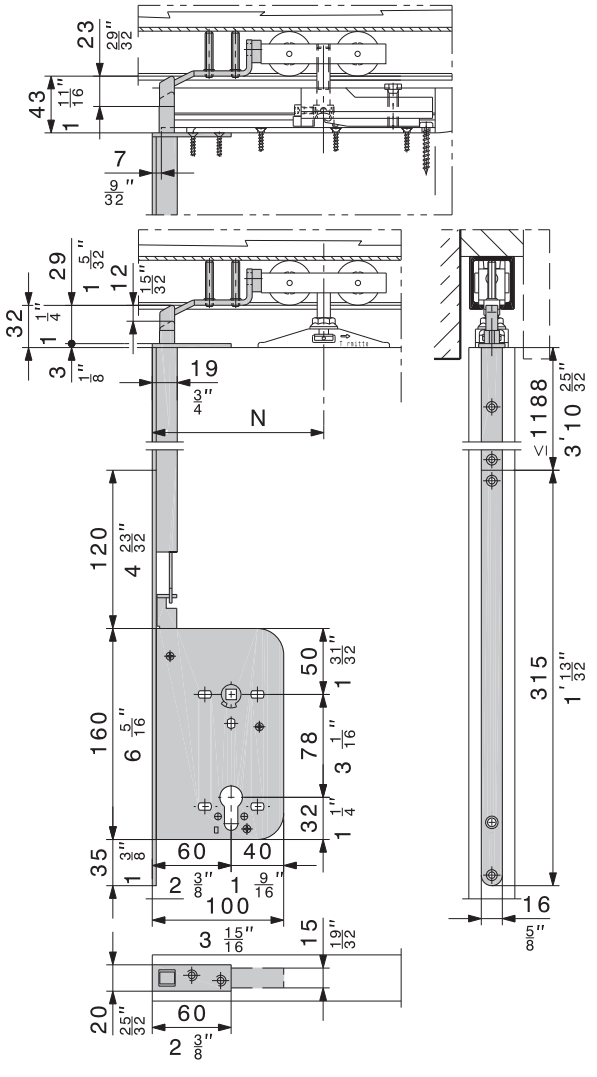

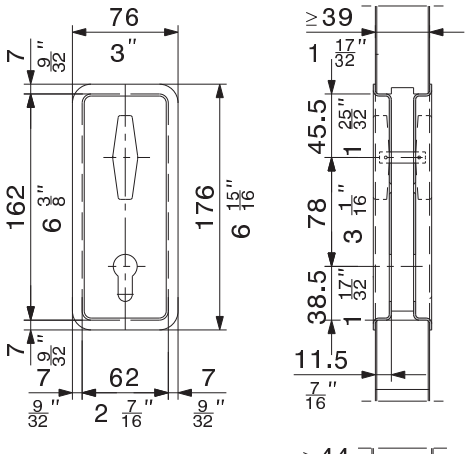

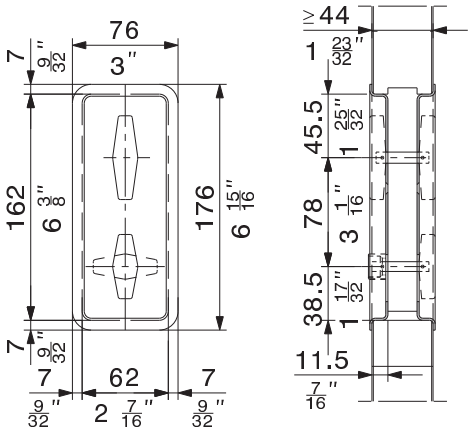

HAWA-Silent-Stop, bar bolt lock for sliding doors with a height of up to 2350 mm (7'8 7/16") and a max. door weight of 160 kg (352 lbs.).

Description

This reliable lock closes in the top track. Special strike plates are available for installing the lock in the top tracks of HAWA-Junior hardware for door weights of up to 160 kg (352 lbs.). A variety of corresponding inlet apertures are also available.

Bar bolt lock HAWA-Silent-Stop

Caution: Hole positions vary.		code
	Steel galvanized Left- and right-hand use Backset 60 mm (2 23/64") Aperture spacing 78 mm (3 5/64") Forend 16/3/315 mm (5/8" / 1/8" / 1 13/32") Socket 8 mm Without strike plate Push bar, guide profile and lock plate can be shortened	
	with hinged-ring key	14349
	for 17 mm (43/64") profiled cylinder	14350
	with 7 mm socket (WC)	14351

Inlets for HAWA-Silent-Stop bar bolt lock

		code
	Set of inlets Brass, matt nickel-plated Aperture spacing 78 mm (3 5/64") Wood thickness 39 – 70 mm (1 17/32" – 2 3/4") Set comprising: 2 inlets 1 pair thumb turns with 8 mm (5/16") square pin	
	for hinged-ring key	15232
	for 17 mm (43/64") profiled cylinder	15234
	Set of inlets for WC bar bolt lock Brass, matt nickel-plated Aperture spacing 78 mm (3 5/64") Wood thickness 44 – 70 mm (1 47/64" – 2 3/4") Set comprising: 1 inlet external, with visible plate green/red 1 inlet interior, with low thumb, and 7 mm square pin 1 pair thumb turns (top), with 8 mm (5/16") square pin	15236
The indicated minimum door thickness refers to sliding doors with a mortise located exactly in the centre of the door panel.		

Special strike plates for HAWA-Silent-Stop

			code
	Strike plate, steel galvanized	HAWA-Junior 40	10746
		HAWA-Junior 80	10734
		HAWA-Junior 120	14872
		HAWA-Junior 160	10745
		HAWA-Silenta 150/B	10736
	Lock catch to track stop HAWA-Junior 80		10751
	Strike plate to HAWA-Media 70		10739

Subject to modification. Metric specifications are exact. Inches are approximate.