




Brand	Root
	FQCZ...

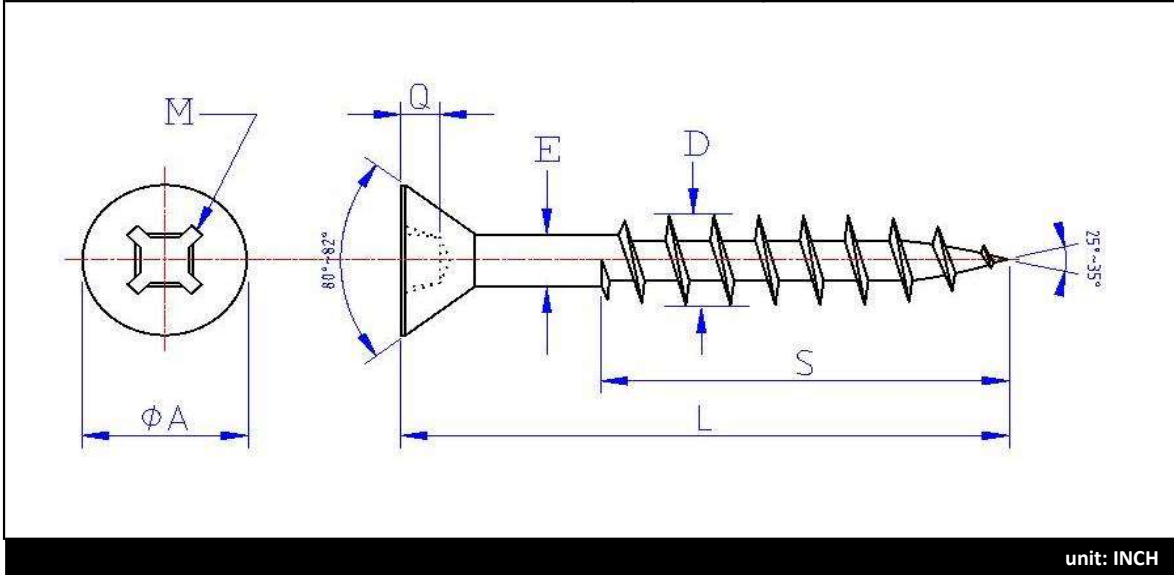

unit: INCH

L LENGTH TOLERANCE	≤ 5/8"	+ 0	- 0.03
	> 5/8" to ≤ 1-1/2"	+ 0	- 0.05
	> 1-1/2" to ≤ 2-3/4"	+ 0	- 0.06
	> 2-3/4" to ≤ 5"	+ 0	- 0.09

S THREAD LENGTH	< 1"	Full Thread
	≥ 1"	2/3 Thread

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	E BODY DIAM.	D THREAD DIAM.	THREAD PER INCH	Min. Torsional Strength Lb/Inch
# 6	# 1	Min	0.050	0.244	0.103	0.142	12	24
		Max	0.065	0.279	0.108	0.153		
# 7	# 1	Min	0.050	0.268	0.112	0.159	11	30
		Max	0.065	0.305	0.117	0.166		
# 8	# 2	Min	0.060	0.292	0.121	0.168	10	39
		Max	0.075	0.332	0.126	0.179		
# 10	# 2	Min	0.060	0.340	0.142	0.194	9	56
		Max	0.075	0.385	0.147	0.205		

Flat Countersunk Head, Quadrex recess, Wood screw Coarse Thread, Zinc

Root= Flat Quadrex Coarse Zinc

Bulk Label Description:

- English: FLAT HEAD, QUADREX, WOOD SCREW, COARSE THREAD, ZINC
- French: VIS À BOIS GROS FILET, TÊTE PLATE, QUADREX, ZINC
- Spanish: TORNILLO PARA MADERA, ROSCA GRUESA, CABEZA PLANA, QUADREX, ZINC

Date: 19 mars 2019

Done by: P.B.