

- 1** SCREWS AND FASTENERS
- 2** FURNITURE EQUIPMENT
- 3** HINGES
- 4** SLIDES
- 5** CASTERS AND LEGS
- 6** KITCHEN SOLUTIONS
- 7** CLOSET SOLUTIONS
- 8** LIGHTING SOLUTIONS
- 9** SINKS AND FAUCETS
- 10** OFFICE
- 11** SLIDING DOORS
- 12** GLASS HARDWARE
- 13** PANELS AND SURFACES
- 14** EDGE-BANDING
- 15** CABINET DOORS AND DRAWERS
- 16** CORBELS AND FLOOR REGISTERS
- 17** GLUES, SILICONES, CAULK AND INSULATING
- 18** TOOLS AND SECURITY
- 19** FINISHING PRODUCTS AND SHOP SUPPLIES
- 20** COMMERCIAL DISPLAY HARDWARE
- 21** MOLDING, RAILING AND BATHROOM HARDWARE

## BRIDGE 500 - ALUMINUM FRAMED SLIDING DOOR KIT

Easy assembly and installation.

The BRIDGE 500 Bypassing aluminium frame door kit is a bottom running sliding door system for doors weighing up to 132 lb (60 kg) for each door.

- Designed for a maximum door opening of 78" wide x 82" tall (2000 mm x 2087 mm)
- Dual upper guide and bottom running tracks
- Soft close mechanisms in both directions for both doors
- Includes sliding door hardware for two doors
- Aluminum frame profiles can be cut to suit the desired door sizes
- Aluminium frame profiles are designed to work with 5/32" (4 mm) thick glass with standard gasket or up to 3/8" (10 mm) wood panels without the gasket

**Application:** Closet & walk-in closet, wardrobe, pantry, furniture, cabinet and storage

PRODUCT	FINISH	DOOR THICKNESS	DOOR WIDTH	MAXIMUM DOOR HEIGHT	NUMBER OF DOORS	QTY/ BOX
89K3695005090	Black	5/32" to 5/16"	41 5/16"	82 3/16"	2	1
89K3695005110	Satin Aluminum	(4 to 8 mm)	(1050 mm)	(2087 mm)		

### Required product(s):

PRODUCT	DESCRIPTION
89K2510	Lock button
891MG1743	Bridge 500 assembly screw
891MD031	Stopper for interior track

### Suggested product(s):

PRODUCT	DESCRIPTION
8911001L2005XXX	Top track guide
892008900044KT	Transparent joint for bridge 500
8910659L2005XXX	Track for bridge 500 and bridge 600



## BRIDGE 600 - BYPASSING WOOD DOOR KIT

Ball bearings, easy assembly.

The BRIDGE 600 Bypassing Wood Door kit is a bottom running sliding door system for doors weighing up to 132 lb (60 kg) for each door.

- Designed for a maximum door opening of 78" wide x 82" tall (2000 mm x 2087 mm)
- Dual upper guide and bottom running tracks
- Soft close mechanisms in both directions for both doors
- Includes sliding door hardware for two wooden doors

**Application:** Closet & walk-in closet, wardrobe, pantry, furniture, cabinet and storage

PRODUCT	FINISH	DOOR THICKNESS	DOOR WIDTH	MAXIMUM DOOR HEIGHT	NUMBER OF DOORS	QTY/ BOX
89K3706005090	Black	0 to 7/8"	41 5/16"	82 3/16"	2	1
89K3706005110	Satin Aluminum	(0 to 22 mm)	(1050 mm)	(2087 mm)		

### Required product(s):

PRODUCT	DESCRIPTION
8910659L2005XXX	Track for bridge 500 and bridge 600

### Suggested product(s):

PRODUCT	DESCRIPTION
89K3420	Bridge 500 and bridge 600 soft-close mechanism
890K243500	Bottom track hardware for bridge 500
89K16415600	Top roller guide for bridge 600
8911007L2005XXX	Top track guide
8910827L2032511	Vertical profiled handle for bridge 600
89K16315600	Bottom track hardware for bridge 600
89K3680600	




## HARDWARE PARTS FOR BRIDGE 500 AND BRIDGE 600

Replacement parts for Bridge 500 and Bridge 600.

REF.	PRODUCT	DESCRIPTION	FINISH	QTY/BOX
A	89K16315600	bottom track hardware for Bridge 600 - trolley	-	1
	89K3680600	bottom track hardware for Bridge 600 - hardware set	-	
B	89K16415600	top roller guide for Bridge 600	-	
C	891MG1743	Bridge 500 assembly screw	-	
D	8910659L2005090*	track for Bridge 500 and Bridge 600 - double rail, surface	Black	
	8910659L2005110*		Satin Aluminum	
	8910812L2005090*	track for Bridge 500 and Bridge 600 - single rail, surface	Black	
	8910812L2005110*		Satin Aluminum	
	8910879L2005090*	track for Bridge 500 and Bridge 600 - single rail, hidden	Black	
8910879L2005110*	Satin Aluminum			
E	89K3420	Bridge 500 and Bridge 600 soft-close mechanism	-	
F	89T22142P	Bridge 500 and Bridge 600 end stopper	-	
G	891CT2203P	activator for Bridge 500 bumper	-	
H	891MD031	stopper for Bridge 500 interior track	-	
I	8911007L2005090*	top track guide for Bridge 500 and Bridge 600 - single guide rail	Black	
	8911007L2005110*		Satin Aluminum	
	8911001L2005090*	top track guide for Bridge 500 and Bridge 600 - double guide rail	Black	
	8911001L2005110*		Satin Aluminum	
J	8920087L30044GL**	transparent seal for Bridge 500	Clear	
K	8910828L2032511	vertical profiled counter-handle for Bridge 600	Satin Aluminum	
L	8910828L2032511	Bridge 600 divider profile	Satin Aluminum	
M	8910827L2032511	vertical profiled handle for Bridge 600	Satin Aluminum	
N	89K2510	Bridge 500 lock button	-	
O	890K243500	bottom track hardware for Bridge 500	-	

\* Sold in length of 2 linear meter

\*\* Sold in length of 3 linear meter

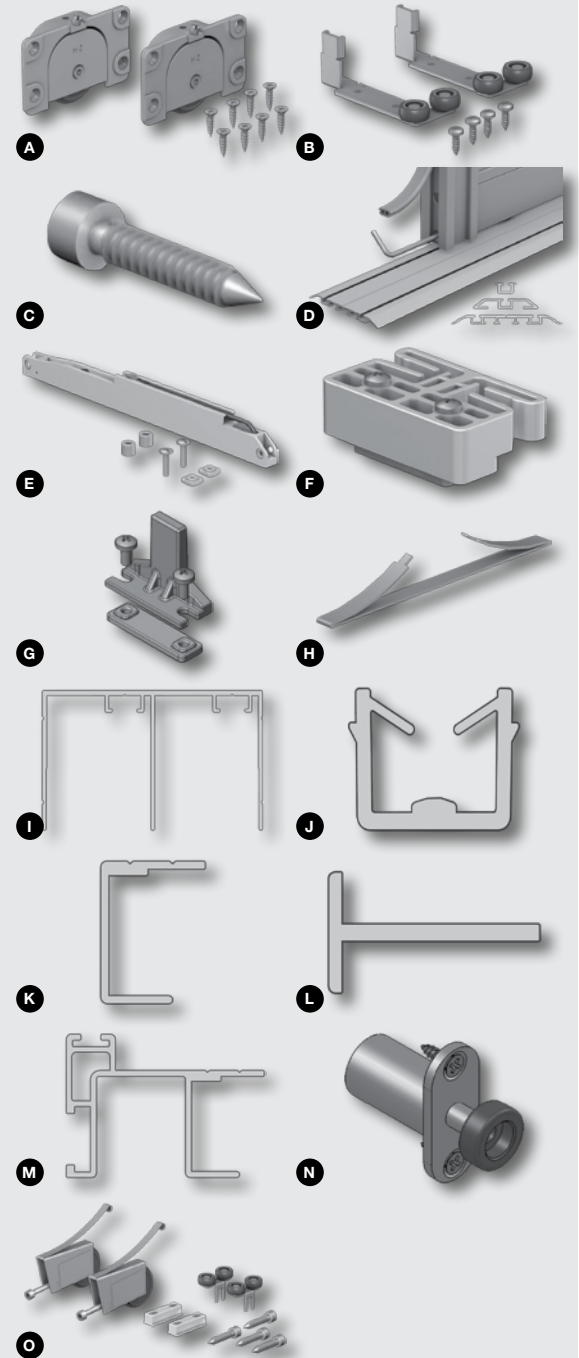

- 1** SCREWS AND FASTENERS
- 2** FURNITURE EQUIPMENT
- 3** HINGES
- 4** SLIDES
- 5** CASTERS AND LEGS
- 6** KITCHEN SOLUTIONS
- 7** CLOSET SOLUTIONS
- 8** LIGHTING SOLUTIONS
- 9** SINKS AND FAUCETS
- 10** OFFICE
- 11** SLIDING DOORS
- 12** GLASS HARDWARE
- 13** PANELS AND SURFACES
- 14** EDGE-BANDING
- 15** CABINET DOORS AND DRAWERS
- 16** CORBELS AND FLOOR REGISTERS
- 17** GLUES, SILICONES, CAULK AND INSULATING
- 18** TOOLS AND SECURITY
- 19** FINISHING PRODUCTS AND SHOP SUPPLIES
- 20** COMMERCIAL DISPLAY HARDWARE
- 21** MOLDING, RAILING AND BATHROOM HARDWARE

## BARN DOOR SINGLE PULL

Ideal industrial style handle for sliding door.

Included:

- Handle
- 2 3/16" (55 mm) screw for door 1 3/8" to 1 9/16" (35 to 40 mm) of thickness
- Two 1" (25 mm) buttons

Sold by unit


PRODUCT	FINISH	DOOR THICKNESS	LENGHT	Ø	PROJECTION	CENTER TO CENTER DRILLING (SPACING)	QTY/BOX
24620700252690	Black	1 3/4" to 2 3/16" (45 to 55 mm)	19 3/4" (502 mm)	19 mm	2 5/16" (59 mm)	11 13/16" (300 mm)	10
246207002592170	Stainless Steel						



## POCKET DOOR BOLTS JAMB BOLT

The Pocket Door Jamb Bolt is designed to be face-mounted at the rear of a closed pocket door and acts as a privacy bolt preventing the door from opening.

PRODUCT	FINISH	HEIGHT	CENTER TO CENTER DRILLING (SPACING)	QTY/BOX
89PDB42AB	Antique Brass	3 1/16" (78 mm)	2 3/8" (61 mm)	1
89PDB4290	Black			
89PDB42195	Brushed Nickel			
89PDB420RB	Brushed Oil-Rubbed Bronze			
89PDB42140	Chrome			
89PDB42130	Polished Brass			



## TITUSOFT SD-100 SOFT-CLOSING SYSTEM

Universal soft-closing mechanism that accommodates a wide variety of wall-mounted barn door sliding doors.

- Fast and gentle closing action with quiet landing
- Easy to mount - Simple and precise mounting on the top of the cabinet, inside application
- Non-handed design - Mounting on left or right side of the cabinet

**Included:** Included: 1 soft-closing mechanism, 1 activator, 1 screw and 1 wedge

PRODUCT	WEIGHT CAPACITY PER DOOR	QTY/BOX
89SD100RETROKT	110.2 lb (50 kg)	1



