





Ø15 mm Cam "Cam2000"


Drive Type

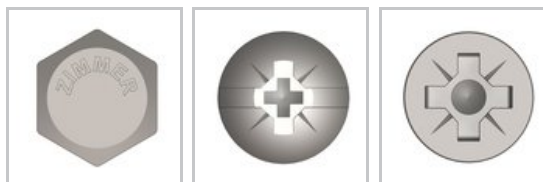

Panel Thickness



Drilling Depth



Quantities per case available



DESCRIPTION

Cam can be screwed in.

ADVANTAGES AND BENEFITS

- Linear cam profile provides smooth, easy cam rotation and dowel pull-up. - The Klix locking feature creates a strong, vibration-proof joint.

AVAILABLE PRODUCTS

Product #	Drive Type	Panel Thickness	Drilling Depth	Quantities per case available
5654	Hexagonal (Hex)	5/8 in*	1/2 in*	2000 units
5656	Multiple	3/4 in*	9/16 in*	2000 units
5676	Multiple	31/32 in*	23/32 in*	500 units
5644	Pozi	5/8 in*	1/2 in*	2000 units

TECHNICAL SPECIFICATIONS

Titus System Number	System 5
Drilling Diameter	19/32 in*
Application	Cam
Product Diameter	19/32 in*
Finish	Zinc
Material	Zinc

Disclaimer

Measures shown with an asterisk (*) have been converted as per your preference. These are not the official measures. To view the measures specified by the manufacturer, [click here](#).

PRODUCT PHOTOS

