



120° Hinges

Fixing Type

Dowel

Quick Assembly

Screw-On

Boring Pattern

1 3/8 in*

1 21/32 in*

1 25/32 in*

Cranking

00

03


9.5

Door Position

Full Overlay

Half Overlay

Closing Mechanism

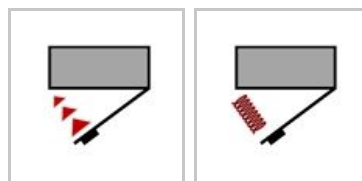

AVAILABLE PRODUCTS

Product #	Fixing Type	Boring Pattern	Cranking	Door Position	Closing Mechanism
GRT120OSCD42	Dowel	1 21/32 in*	03	Full Overlay	Soft-Closing
GRT120O42D	Dowel	1 21/32 in*	03	Full Overlay	Spring Closing
GRT120HSCD42	Dowel	1 21/32 in*	9.5	Half Overlay	Soft-Closing
GRT120HD42	Dowel	1 21/32 in*	9.5	Half Overlay	Spring Closing
GRT120FD	Dowel	1 25/32 in*	00	Full Overlay	Spring Closing
GRT120OSCD	Dowel	1 25/32 in*	03	Full Overlay	Soft-Closing
GRT120OD	Dowel	1 25/32 in*	03	Full Overlay	Spring Closing
GRTI120OSC	Quick Assembly	1 21/32 in*	03	Full Overlay	Soft-Closing
GRTI120HSC	Quick Assembly	1 21/32 in*	9.5	Half Overlay	Soft-Closing
GRT120FSCS	Screw-On	1 3/8 in*	03	Full Overlay	Soft-Closing
GRT120OSCS	Screw-On	1 25/32 in*	03	Full Overlay	Soft-Closing
GRT120OS	Screw-On	1 25/32 in*	03	Full Overlay	Spring Closing
GRT120HSCS	Screw-On	1 25/32 in*	9.5	Half Overlay	Soft-Closing
GRT120HS	Screw-On	1 25/32 in*	9.5	Half Overlay	Spring Closing

TECHNICAL SPECIFICATIONS

Use Type	Standard Door
_Category	grass hinges
_Short Desc.	Grass Euro Hardware Tiomos F045138307228 Hinge; 22 mm Full/Cranking 00 Overlay, Steel, Nickel Plated, 150 Per Box
_Finish	Nickel Plated
_Item	Hinge
Hinge Opening Angle	+120°

Disclaimer

Measures shown with an asterisk (*) have been converted as per your preference. These are not the official measures. To view the measures specified by the manufacturer, [click here](#).

IMPORTANT INFORMATION

- 3-dimensional adjustment with suitable base plate. - Accommodates overlays up to 24 mm (15/16"). - Optimal reveal up to 24 mm door thickness. - Soft-close or self-close hinges available. - For face frame or frameless cabinets. - Convenient depth adjustment with worm gear. Hinge cup: steel, nickel-plated Hinge arm: steel, nickel-plated

PRODUCT PHOTOS

