


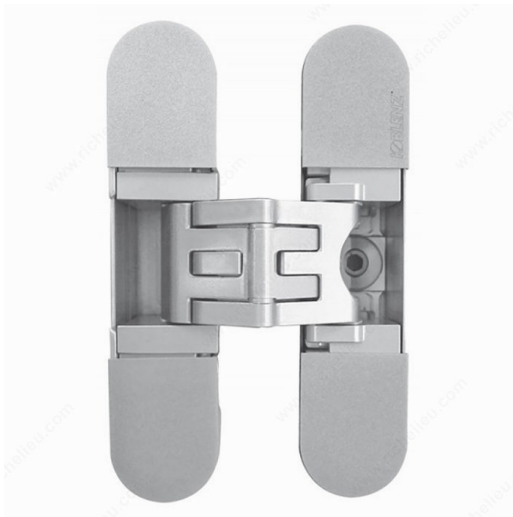

Krona Koblenz 5-Fulcrum Concealed Hinges

Minimum Door Thickness

31/32 in*	1 3/16 in*	1 1/4 in*	1 3/8 to 1 25/32 in*	1 9/16 in*
				1 25/32 in*

Finish

Polished Chrome	Satin Chrome	Satin Nickel
-----------------	--------------	--------------

Material

 Steel	 Zinc Alloy (Zamak)
--	---

Fire Resistant

30 minutes	None
------------	------

Maximum Capacity (2 Hinges)

66.1 lb*	72.8 lb*	99.2 lb*	110 lb*	132 lb*
176 lb*				

Maximum Capacity (3 Hinges)

88.2 lb*	99.2 lb*	132 lb*	154 lb*
----------	----------	---------	---------

Standards and Certifications

Not Certified	UL / UL10C / ULC
---------------	------------------

Handedness

Reversible	Right-Hand Opening
------------	--------------------

Hinge Opening Angle

+160°	+180°
-------	-------

Packaging format

Per unit

Box of 2

DESCRIPTION

3-axis adjustable

AVAILABLE PRODUCTS

Product #	Minimum Door Thickness	Finish	Material	Fire Resistant	Maximum Capacity (2 Hinges)	Maximum Capacity (3 Hinges)	Standards and Certifications	Handedness	Hinge Opening Angle	Packaging format
802460SC	31/32 in*	Satin Chrome	Steel	30 minutes	132 lb*	132 lb*	UL / UL10C / ULC	Reversible	+180°	Box of 2
802460SN	31/32 in*	Satin Nickel	Steel	30 minutes	132 lb*	132 lb*	UL / UL10C / ULC	Reversible	+180°	Box of 2
806400SC	1 3/16 in*	Satin Chrome	Zinc Alloy (Zamak)	None	66.1 lb*	99.2 lb*	Not Certified	Reversible	+180°	Per unit
806400SN	1 3/16 in*	Satin Nickel	Zinc Alloy (Zamak)	None	66.1 lb*	99.2 lb*	Not Certified	Reversible	+180°	Per unit
806921SNR	1 3/16 in*	Satin Nickel	Zinc Alloy (Zamak)	None	72.8 lb*	88.2 lb*	Not Certified	Right-Hand Opening	+180°	Per unit
806200PC	1 1/4 in*	Polished Chrome	Zinc Alloy (Zamak)	30 minutes	99.2 lb*	132 lb*	UL / UL10C / ULC	Reversible	+180°	Per unit
806200SC	1 1/4 in*	Satin Chrome	Zinc Alloy (Zamak)	30 minutes	99.2 lb*	132 lb*	UL / UL10C / ULC	Reversible	+180°	Per unit
806200PSN	1 1/4 in*	Satin Nickel	Zinc Alloy (Zamak)	30 minutes	99.2 lb*	132 lb*	UL / UL10C / ULC	Reversible	+180°	Per unit
802700SC	1 3/8 to 1 25/32 in*	Satin Chrome	Zinc Alloy (Zamak)	None		132 lb*	Not Certified	Right-Hand Opening	+180°	Per unit
802700SN	1 3/8 to 1 25/32 in*	Satin Nickel	Zinc Alloy (Zamak)	None		132 lb*	Not Certified	Reversible	+180°	Per unit
805080SC	1 9/16 in*	Satin Chrome	Zinc Alloy (Zamak)	30 minutes	176 lb*		UL / UL10C / ULC	Reversible	+180°	Per unit
806700N	1 9/16 in*	Satin Nickel	Zinc Alloy (Zamak)	30 minutes	110 lb*	154 lb*	UL / UL10C / ULC	Reversible	+180°	Per unit
803000SN	1 25/32 in*	Satin Nickel	Zinc Alloy (Zamak)	None	99.2 lb*	132 lb*	Not Certified	Reversible	+160°	Per unit

TECHNICAL SPECIFICATIONS

Type of Hinge	Wood Door Only
Width	1 1/16 in*
Length	4 23/32 in*
Height	1 19/32 in*

Disclaimer

Measures shown with an asterisk (*) have been converted as per your preference. These are not the official measures. To view the measures specified by the manufacturer, [click here](#).

IMPORTANT INFORMATION

2 Year Warranty

PRODUCT PHOTOS

